

ProSeries

# 72" TurfPro Mower



SEE IT IN ACTION

## Grooming Mower Highlights


- ▶ Easy, quick adjust, single point cut height control via the built-in handle and cut height indicator. No wrenches, pins or bolts, lifting, or guess work.
- ▶ Innovative TruFlex parallel linkage allows deck to flex up to 14" fore-aft and laterally to follow ground contours ensuring even cut height and virtually eliminating scalping.
- ▶ High floatation tires on the heavy-duty front casters and full width rear anti-scalp / striping roller ensure uniform cut pass-to-pass.
- ▶ Heavy-duty, fully welded, 10 gauge deck with front and side reinforcing and heavy-duty spindles and bearings mean this mower is built to last.
- ▶ High efficiency piston-type hydraulic motor ensures positive power delivery for tough conditions through the double-sided drive belt.



**MAC Company**

*Innovation at work*

# ProSeries 72" TurfPro Mower

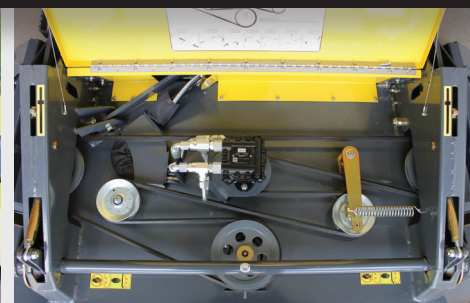

## Specifications

|   |  |
|---|--|
| <b>Width with discharge chute</b>                               | 86.7" (2202 mm)                          |
| <b>Cutting width (side discharge)</b>                           | 72" (1828 mm)                            |
| <b>Discharge chute</b>  | Durable rubber design                    |
| <b>Operating weight</b>   | 774 lbs (351kg)                          |
| <b>Weight with quick attach plate</b>                           | 934 lbs (423.7 kg)                       |
| <b>Height of cut adjustment handle</b>                          | 2 - 5" (51 - 127 mm)                     |
| <b>Cutting height indicator scale</b>                           | Single point, 1/10" (2.54 mm) increments |
| <b>Height adjustment accuracy</b>                               | Accurate at all cutting heights          |
| <b>Leveling (initial leveling at factory)</b>                   | 3 point independent leveling             |
| <b>Deck construction</b>  | 10 gauge deck top, 7 gauge deck sides    |
| <b>Additional deck side impact protection</b>                   | .25" (6.35 mm) side protection plates    |
| <b>Deck front impact protection</b>                             | 10 gauge roll-formed front reinforcement |
| <b>Mowing blades - three blades</b>                             | .25" (6.35 mm) thick, 24.5" (622.3 mm)   |
| <b>Lateral and fore-aft deck float</b>                          | 14" (356 mm)                             |
| <b>Hydraulic drive, over pressure relief</b>                    | High efficiency piston motor             |
| <b>Blade drive from hydraulic motor</b>                         | Two-sided heavy duty BB belt             |
| <b>Heavy duty blade spindles with deep groove ball bearings</b> | Dust slingers built in top and bottom    |
| <b>Bearing and seal protection</b>                              | Twine cutter standard                    |
| <b>Floatation gauge wheels</b>                                  | 13" x 5.5" (330 x 140 mm) run flat       |
| <b>Heavy duty caster spindle</b>                                | 1.25" (31.75 mm)                         |
| <b>Anti-scalp / striping roller</b>                             | 5" (127 mm) diameter, ball bearings      |
| <b>Easy cleanout and blade maintenance</b>                      | Loader lift system                       |

## ProSeries Standard Features

- ▶ Low profile universal quick attach
- ▶ Robust construction
- ▶ "Contractor Grade" - High strength materials throughout
- ▶ Hydraulic hoses, couplers and electrical harnesses are included

MAC Company LLC reserves the right to change the stated specifications without notice. This brochure is for descriptive purposes only and reasonable efforts were used to set forth the contained information, some items shown may be optional and some products shown may not be available at all dealerships. MAC Company LLC disclaims all representations and warranties, express or implied, or any liability from the use of this brochure. For complete warranty, safety and product information consult your local MAC Company dealer and the operator's manual. Power, (HP/KW) and other specifications are based on various standards or recommended practices. For your safety, MAC Corporation strongly recommends the use of a Rollover Protective Structure, Falling Object Protective Structure and seat belt in all applications. The brochure is intended for the United States and US territories only. For information regarding MAC Company products or services outside these areas see MAC Company's web site. MAC Company does not provide parts, warranty or service for any Product which is re-sold or retailed in any country other than the country for which the Products were designed or manufactured. SwingSteer is a registered trademark of MAC Company LLC. The reader is hereby placed on notice of MAC Company, LLC's rights in the United States to patents listed at: [www.macccompany.com/patents](http://www.macccompany.com/patents).

[macccompany.com](http://macccompany.com)

1740 Main Ave W, Ste F, West Fargo, ND 58078 // 701.203.3811

dealer info